


Physical installation instructions

IKI Electric heaters 9 kW with UKU Glass Black control unit

Models: Pillar IKI 9 kW, Wall IKI 9 kW and Corner IKI 9 kW

The temperature sensor should be installed no less than 39.4 inches (1000 mm) from an undirected air vent income, or less than 19.7 inches (500 mm) from a directed air vent.

You can download IKI app by searching "HUUM IKI" in the app store

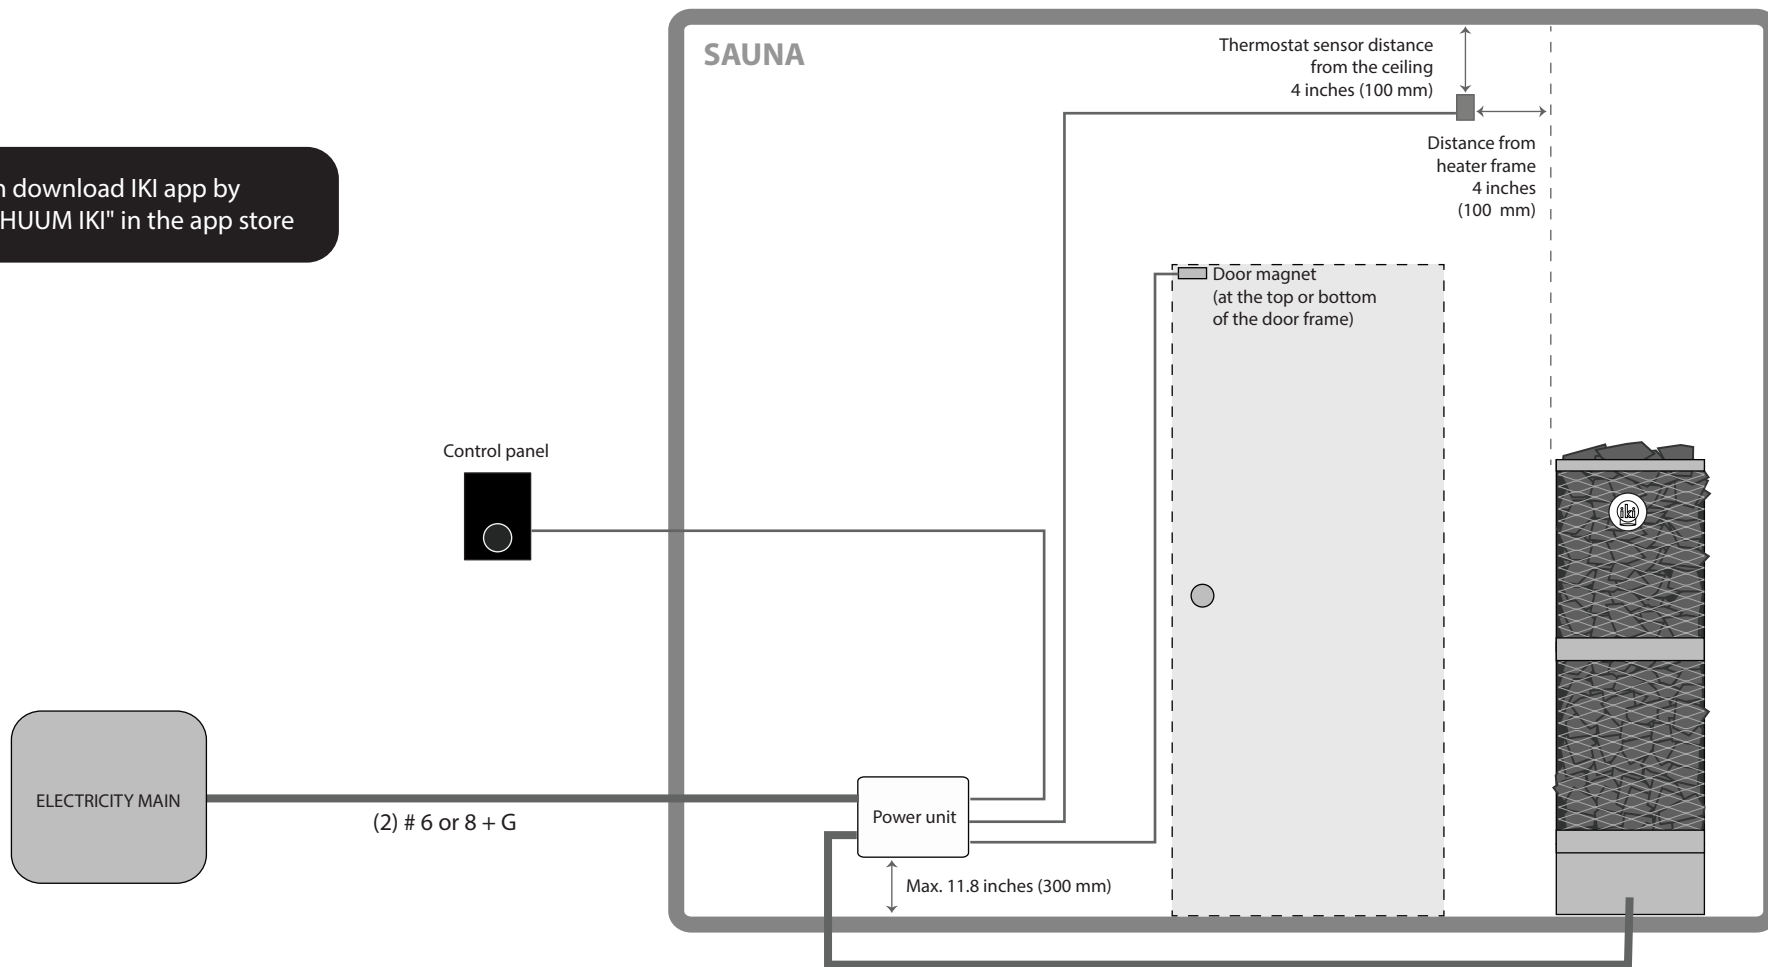

If the power unit is installed inside the sauna:

Lower edge max. 11.8 inches from the floor
and min. 39.4 inches from the heater
Temperature max. 122°F (50°C)
Relative humidity max. 95%

(2) # 6 or 8 + G